

## Features

- ▶ Field replaceable PCW Sticks.
- ▶ Individual flow, balance, pressure, temperature & shut-off for each connection.
- ▶ Robust header and stick design.
- ▶ Replaces standard raised floor tiles.
- ▶ Available with telescopic frame or full containment enclosure.
- ▶ Reduce on-site cost, labor, and risk.

## Technical Data

### Temperature Rating:

10°F(-12°C) to 200°F(90°C)\*  
\*Dependent on Stick Type

### Pressure Rating:

150 psig (10 bar) @70°F (21°C)

### Regulator Outlet Range (Optional):

10 psig (0.5 bar) to 100 psig (7 bar)

## Ordering Information

### FM2T-LG-1.625-H-1E-5E5D-L-BB

#### Header Valves

- X - None
- L - Ball Valve
- D - Diaphragm
- R - Pressure Regulator (supply only)

#### Stick End Connections

- B - Barb
- Q - Quick Disconnect
- N - NPT(F)
- P - PVC Socket

#### Sticks

- C - 1/2" (0-5 gpm flowmeter)
- D - 3/4" (0-10 gpm flowmeter)
- E - 1" (0-20 gpm flowmeter)

#### Stick Type

- 1E - PW Series
- 1N - NEHP Series 1
- 2N - NEHP Series 2

#### Header Size

- G - 1.5" diameter
- H - 2.0" diameter

#### Raised Floor Height (in.)

#### Lid Type

- LG - Layered Composite (1 Piece, Clear)
- AC - Lexan w/Support (2 Piece)


#### Series Type

- FM2T - Telescopic
- FM2E - Enclosure

**Note** Product availability and specifications contained herein are subject to change without notice. Consult factory for potential revisions.





# FM2 Series Floor Module

Liquid Equipment Hook-Up Module For  
Process and Critical Waters

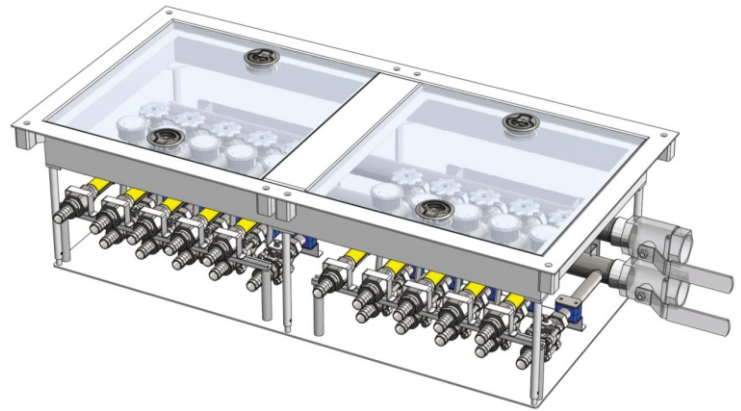

## Dimensions

Patent Number US 7,039,999 B2

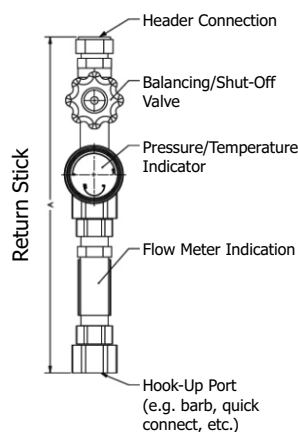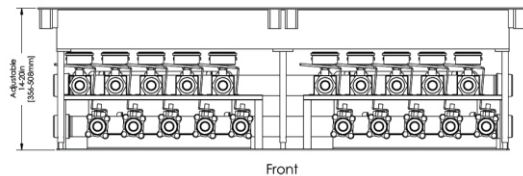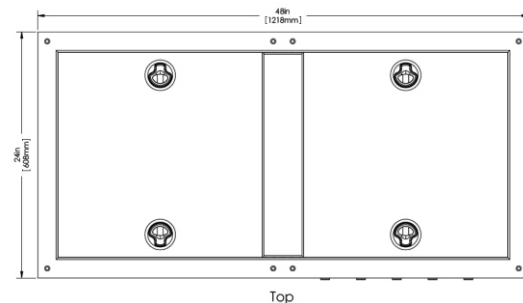

Size	Length A	Length B
1/2"	14.5"	3.4"
3/4"	15.2"	4.2"
1"	16.1"	5"



**DFS** Diversified Fluid Solutions  
A Critical Process Systems Group Company

11789 W. Executive Drive  
Boise, Idaho 83713  
P: +1 208.489.0053  
Web: [www.dfsolution.com](http://www.dfsolution.com)  
Email: [info@dfsolution.com](mailto:info@dfsolution.com)