

Features

- ▶ Up to 9 spec gas sticks.
- ▶ Up to 2 purge types.
- ▶ Designed to easily replace RAF floor tiles.
- ▶ All bottom connections.
- ▶ LOTO isolations of HPM gases.
- ▶ Handles flammable, pyrophoric, corrosive & oxidizer gases.
- ▶ FRO on each gas stick - reduces tool exhaust requirement.
- ▶ Area monitor interface - dry contact switches & optional flash detection.

Technical Data

Frame:

Carbon Steel

Finish:

Powder Coat

Color:

White standard, Color match available upon request

Load Rating:

500 lb. Point Load

Ordering Information

FM1E-1.625-02-39-01

UV/IR Flame Detector

- 00 - Not Required
- 01 - Required

Sticks

- 13 - 1x3
- 16 - 1x6
- 26 - 2x6
- 29 - 2x9
- 39 - 3x9

Number of Headers

- G - 1.5" diameter
- H - 2.0" diameter

Raised Floor Height (in.)

Series Type

FM1E - Enclosure

FM1 Series



HPM Gas Floor Module

HPM Hook-Up



Dimensions

Patent Number US 7,039,999 B2

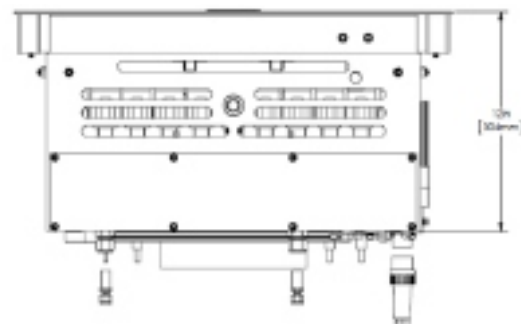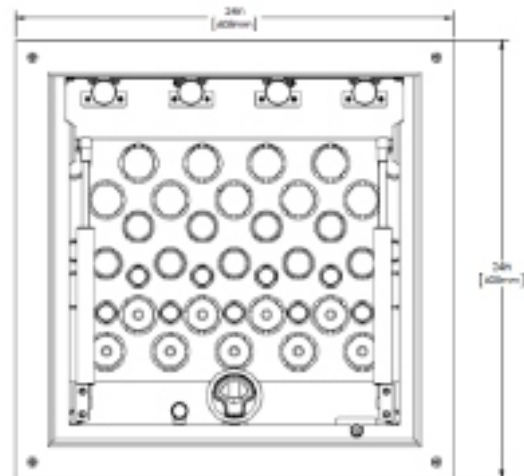

Note Product availability and specifications contained herein are subject to change without notice. Consult factory for potential revisions.



DFS Diversified Fluid Solutions
A Critical Process Systems Group Company

11789 W. Executive Drive
Boise, Idaho 83713
P: +1 208.489.0053
Web: www.dfsolution.com
Email: info@dfsolution.com